TALAS

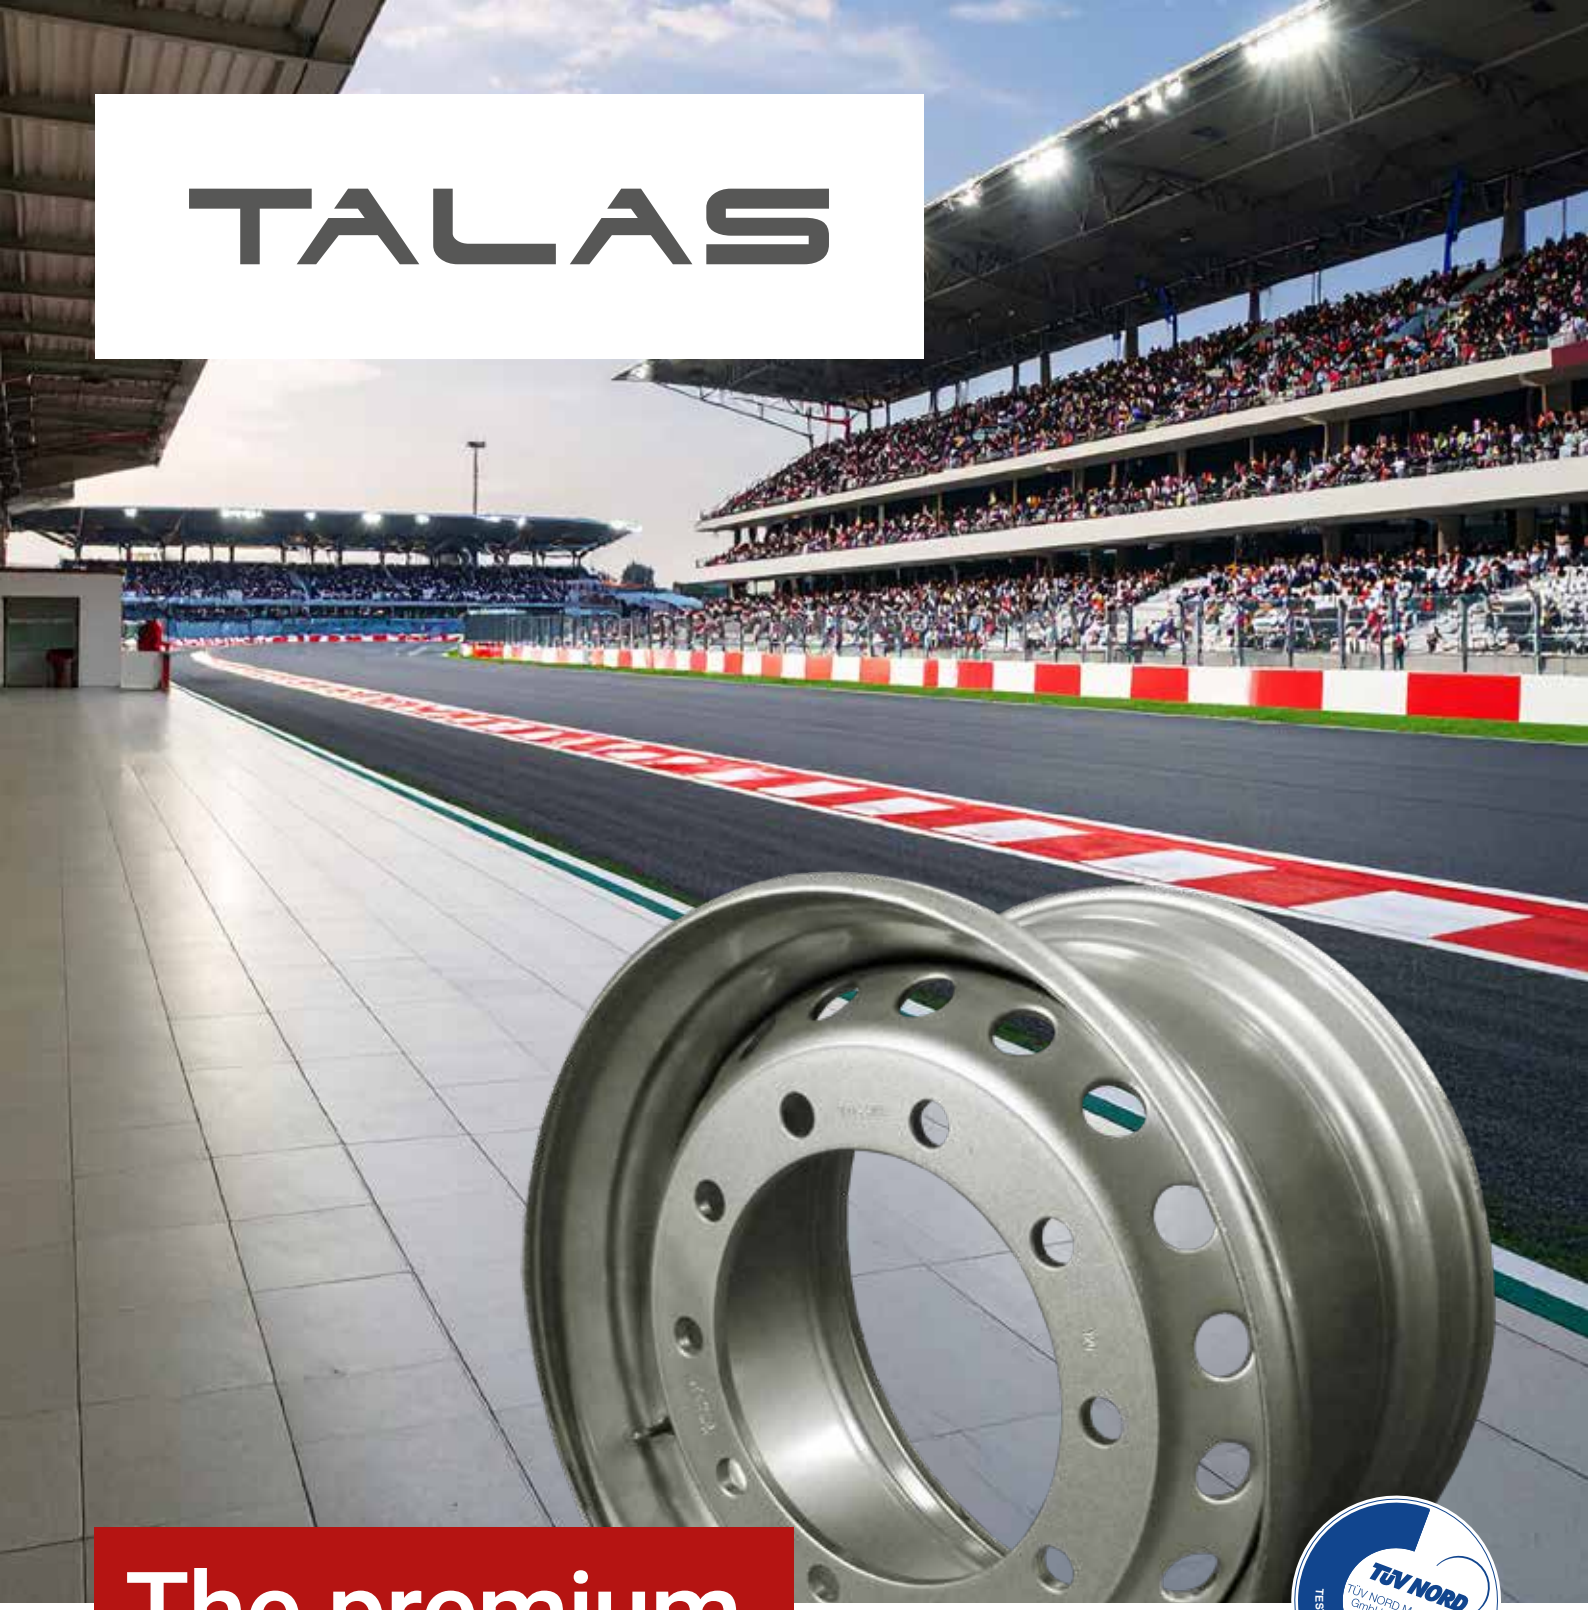

The premium truck steel rim

OEM quality | Powered by Germany | Available as a complete wheel

Truck steel rims

TALAS

TEP-No.	Wheel size	Wheel type	Coating	Center bore	Pitch circle	No. of studs	Offset	Weight	Load capacity	Tyre size
TEPAA228942278	6.00 x 17.5	MZ (Ø 26) IV	NL	176	225	10	113	21,4 kg	2.750 kg	205/65 R 17.5
TEPAA229100220	6.00 x 17.5	MZ (Ø 26) IV	PB	176	225	10	113	25 kg	2.750 kg	205/75 R 17.5 215/75 R 17.5 225/75 R 17.5
TEPAA228945281	6.75 x 17.5	BMZ (Ø 21) AV	NL	161	205	6	0	25,5 kg	3.000 kg	215/75 R 17.5
TEPAA228942772	6.75 x 17.5	BMZ (Ø 26) IV	NL	176	225	10	123	25,6 kg	3.000 kg	225/75 R 17.5
TEPAA228921088	6.75 x 17.5	BMZ (Ø 26) IV	NL	176	225	10	129	25,3 kg	3.000 kg	235/75 R 17.5
TEPAA229100358	6.75 x 17.5	BMZ (Ø 26) IV	PB	176	225	10	129	26 kg	3.000 kg	245/70 R 17.5
TEPAA228896320	7.50 x 19.5	MZ (Ø 26) AV	NL	221	275	8	139	27,3 kg	2.800 kg	245/70 R 19.5 265/70 R 19.5 285/70 R 19.5
TEPAA229073811	8.25 x 22.5	BMZ (Ø 26) AV	NL	281	335	10	156	41,2 kg	3.750 kg	12 R 22.5
TEPAA229100221	8.25 x 22.5	BMZ (Ø 26) AV	PB	281	335	10	154	41 kg	3.750 kg	275/70 R 22.5 285/60 R 22.5 295/60 R 22.5 295/80 R 22.5
TEPAA228963052	9.00 x 22.5	BMZ (Ø 26) AV	NL	281	335	10	162	40,6 kg	4.250 kg	13 R 22.5
TEPAA229100214	9.00 x 22.5	BMZ (Ø 26) AV	PB	281	335	10	161	39 kg	4.000 kg	295/60 R 22.5 295/80 R 22.5 315/60 R 22.5 315/70 R 22.5 315/80 R 22.5
TEPAA228939214	11.75 x 22.5	BMZ (Ø 26) AV	NL	281	335	10	0	41,2 kg	5.000 kg 5t	
TEPAA229100215	11.75 x 22.5	BMZ (Ø 26) AV	PB	281	335	10	0	38,5 kg	5.000 kg 5t	
TEPAA228955113	11.75 x 22.5	MZ (Ø 26) AV	NL	281	335	10	120	42,2 kg	5.000 kg 5t	355/50 R 22.5
TEPAA229100216	11.75 x 22.5	MZ (Ø 26) AV	PB	281	335	10	120	38,5 kg	5.000 kg 5t	385/55 R 22.5
TEPAA229065319	11.75 x 22.5	MZ (Ø 26) AV	NL	281	335	10	135	45,6 kg	5.000 kg 5t	385/65 R 22.5
TEPAA229100217	11.75 x 22.5	MZ (Ø 26) AV	PB	281	335	10	135	45,5 kg	5.000 kg 5t	
TEPAA228973732	14.00 x 19.5	MZ (Ø 26) AV	NL	281	335	10	0	40,6 kg	5.000 kg 5t	425/55 R 19.5
TEPAA229100218	14.00 x 19.5	MZ (Ø 26) AV	PB	281	335	10	0	44 kg	4.500 kg	435/50 R 19.5
TEPAA228939688	14.00 x 19.5	MZ (Ø 26) AV	NL	281	335	10	120	40,6 kg	5.000 kg 5t	445/45 R 19.5
TEPAA229100219	14.00 x 19.5	MZ (Ø 26) AV	PB	281	335	10	120	44 kg	4.500 kg	

AV = external valve | IV = internal valve | NL = wet paint | PB = powder coating | 5t 5.000 kg load capacity

- High quality level according to European ETRTO standards
- TÜV certificated and monitored
- Marked with “POWERED BY GERMANY”
- TPMS valve is already fitted on delivery
- Available as complete wheel
- Contact us even if you need aluminum wheels
- Subjected to further testing in accordance with OEM requirements

TÜV NORD Mobilität GmbH & Co. KG – TESTED IN ACCORDANCE TO ES-3.11

! Complete wheel assembly with **TPMS system** possible!